

ASX ANNOUNCEMENT

Date: 19 February 2016

Number: 450/190216

22% ZINC AMONG FURTHER HIGH GRADE ZINC-SILVER-LEAD AT RED HILL-DORA EAST AT BROKEN HILL

Drill hole RHD020 returns

1.6 metres at 22.0% zinc, 3.6% lead and 66.7 g/t silver

within a broader intercept of

7 metres at 7.0% zinc, 1.1% lead and 20.1 g/t silver

ALSO

0.7 metres at 2.4% copper and 22.5 g/t silver

Mineralisation open in all directions

Three drill holes have now returned significant intercepts of zinc-silver-lead mineralisation with many hundreds of metres of untested strike potential and new targets identified

Area to be renamed the Dora East Prospect

Follow up drilling required

Further very high-grade zinc-silver including up to 22% zinc, and significant lead assays, have been returned from Impact Minerals Limited's (ASX:IPT) Dora East Prospect, part of the Broken Hill Project in New South Wales and which includes the flagship Red Hill Prospect.

The Dora East Prospect was previously part of the Red Hill Prospect but has now been separately defined as a key prospect in its own right.

New assays for Hole RHD020 completed late in 2015 have returned an intercept of:

7 metres at 7% zinc, 1.1% lead and 20.7 g/t silver from 131 metres *including*

1.6 metres at 22.0% zinc, 3.6% lead and 66.7 g/t silver from 132.4 metres (Figures 1 and 2).

In addition, a zone of good copper and silver grades has been identified that returned:

0.7 metres at 2.4% copper and 22.5 g/t silver from 109.5 metres (Figures 1 and 2).

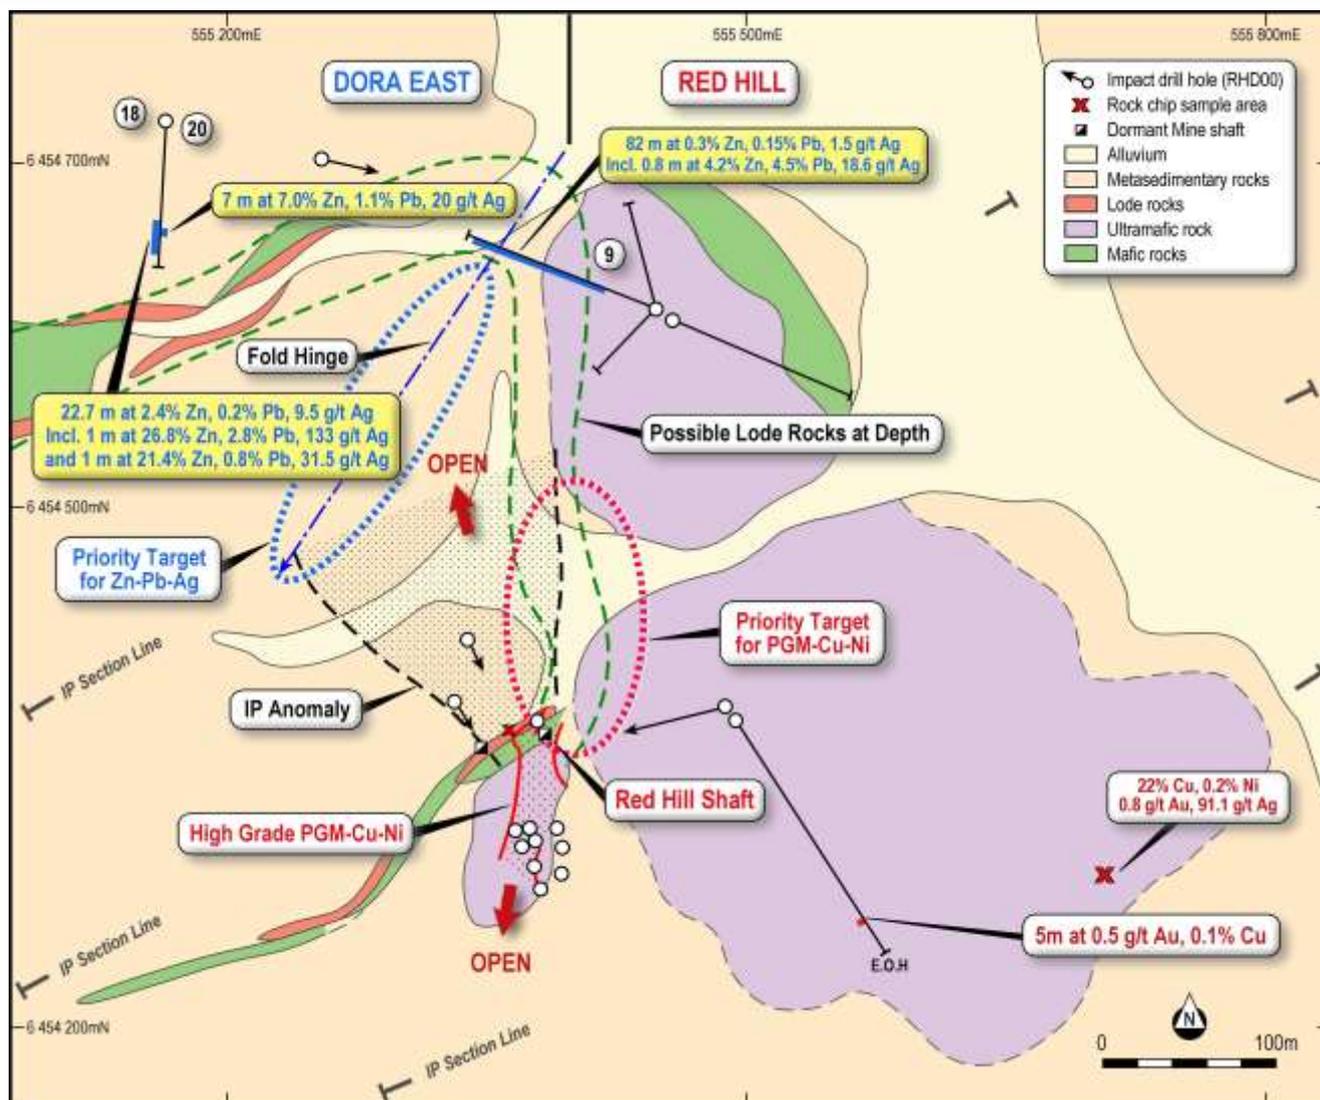


Figure 1. Geology and Drill Hole Location for the Dora East and Red Hill Prospects.

This is now Impact’s third hole at the Dora East Prospect to return robust widths and grades of so-called “Broken Hill-style mineralisation” which comprises zinc, lead, silver and copper hosted by “Lode Rocks” similar to those that surround, and are integral to, the nearby world class Broken Hill 300 million tonne zinc-lead-silver deposit.

The Lode Rocks comprise garnet-bearing metasedimentary rocks and amphibolite units (Figures 1 and 2).

Hole RHD020 was drilled up dip from previous very high grade intercepts in Hole RHD018 and 200 metres along trend from Hole RHD09 which returned a thick intercept of lower grade mineralisation (Figures 1 and 2).

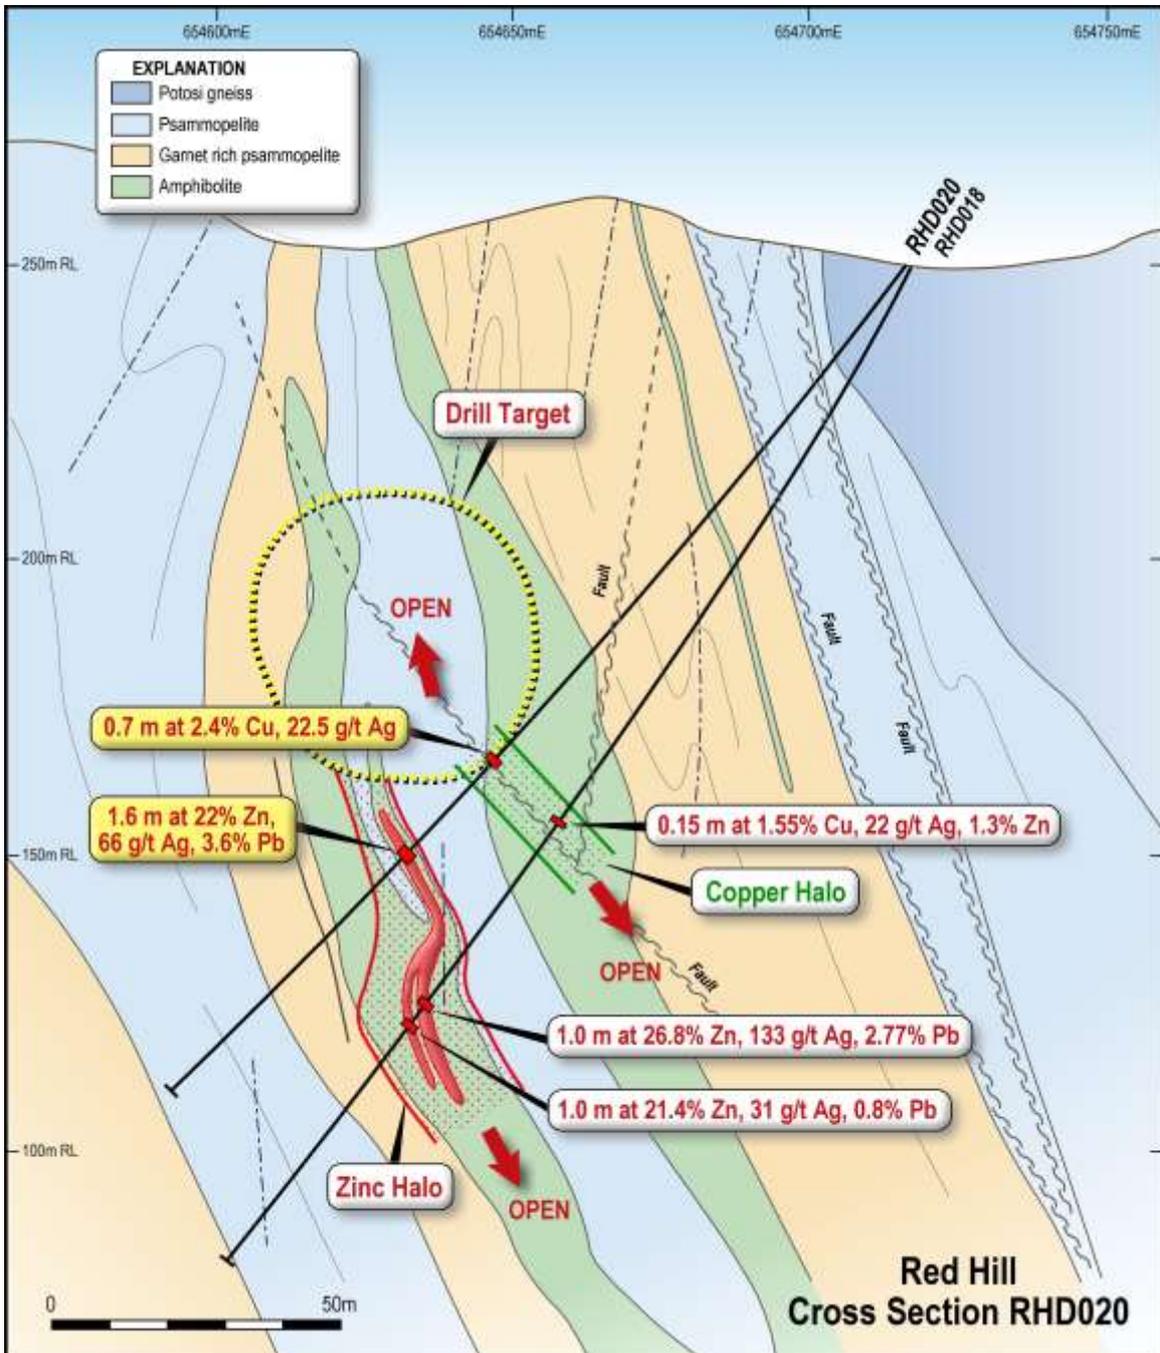


Figure 2. North-South Cross Section for Holes RHD020 and RHD018 looking west.

Hole RHD018 returned:

5.1 metres at 10% zinc, 0.8% lead, 40.4 g/t silver from 148.4 metres including 1 metre at 26.8% zinc, 2.8% lead, 133 g/t silver (4 ounces) from 148.9 metres; and 1 metre at 21.4% zinc, 0.8% lead and 31.5 g/t silver (1 ounce) from 152.5 metres (Figure 1).

The zinc-silver-lead grades are interpreted to be increasing at depth whereas the copper grades are interpreted to be increasing towards the surface. The area up dip of Hole RHD020 has also been identified as an off hole EM conductor and is an immediate drill target (Figure 2).

Hole RHD09 returned:


**82 m at 0.3% zinc, 0.15% lead and 1.5 g/t silver including
0.8 m at 4.2% zinc, 4.5% lead and 18.6 g/t silver.**

The mineralisation is open along strike and up and down dip and there are many hundreds of metres of trend that remain to be drill tested (Figures 1 and 2).

Priority Base Metal Target Identified In Major Fold Hinge

Recent detailed mapping and interpretation of geophysical data by Impact indicates that the Lode Rocks at Dora East are part of a large fold structure that plunges to the south west (Figure 1).

Fold hinges of this scale are common hosts to thick ore positions at the Broken Hill mine. For comparison Figure 3 shows a cross section from the Broken Hill mine that demonstrates how laterally continuous narrow units of sulphide become thicker in the hinge zones of folds. The fold hinge identified by Impact is a priority target for follow up work including drilling.

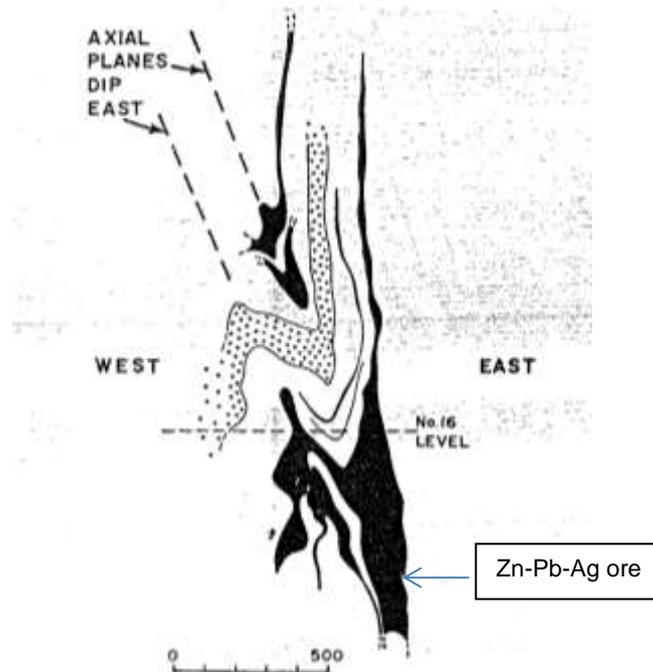

Cross section of Broken Hill lode system at its southerly end (Zinc Corporation Ltd) showing structure in relation to east-dipping axial planes.

Figure 3. Cross- sections through the Broken Hill Mine showing the relationship between fold hinges and thick ore positions (black areas). The fold hinges are commonly several hundred metres below surface.

In addition, an Induced Polarisation anomaly was identified in this area by Impact in a survey completed several years ago (Figure 1). The significance of the anomaly was not clear at the time. However, in light of Impact's recent work, this is now a compelling target for disseminated Broken Hill style mineralisation.

These results are all extremely encouraging for the discovery of a significant zinc-lead-silver deposit at Dora East. In particular, the mineralisation discovered may represent a halo to a larger massive zinc sulphide body along trend or at depth.

Further drilling is warranted and a follow up work programme to include ground geophysical surveys is being designed. This work will be carried out as part of the follow up work around the Red Hill Prospect for high grade PGM-nickel-copper mineralisation.

About the Dora East and Red Hill Prospects

Impact has now shown that the adjacent Red Hill and Dora East Prospects contain robust widths and grades of 12 different metals: platinum, palladium, gold, rhodium, iridium, osmium, ruthenium, nickel, copper, zinc, silver and lead.

This is unprecedented in the Broken Hill region and indicates the highly unusual and very prospective nature of this part of Impact's project area.

The Dora East and Red Hill Prospects lie within E7390. Impact owns 80% of the rights to Broken Hill style mineralisation on this licence in joint venture with Silver City Minerals Limited.

The style of mineralisation is distinct from the platinum-copper-nickel mineralisation associated with ultramafic rocks that has been the focus of Impact's work at the project and for which Impact owns 100% of the rights.

Accordingly, in order to prevent confusion, the western part of the Red Hill Prospect that is prospective for the Broken Hill style mineralisation, has been renamed the Dora East Prospect (Figure 1). The prospect is so named because of several small dormant workings within lode rocks and located a few hundred metres to the west on an adjacent tenement that are called Dora.

Next steps at Broken Hill

Follow up mapping and soil and rock chip sampling programmes at the Little Darling Creek and Platinum Springs Prospects have been completed with assays and final interpretations awaited. All of this data will be reviewed and synthesised to design follow up work programmes including drilling at Red Hill, Dora East, Little Darling and Platinum Springs.

About the Broken Hill Project (see also announcement dated [23rd October 2015](#))

The Broken Hill Project comprises three exploration licences that cover a 40 km trend of rocks prospective for two distinct styles of mineralisation:

1. PGE-copper-nickel associated with ultramafic rocks; and
2. Zinc-lead-silver in "Broken Hill-style" deposits hosted mostly by metasedimentary rocks and amphibolites.

Impact owns 100% of two of the three licences. The mineral rights for the third licence, E7390, were split in the early 2000's into the two different styles of mineralisation.

Impact recently acquired E7390 from Golden Cross Resources Limited and this entitles Impact to:

- 100% of the PGE-copper-nickel mineralisation; and
- 80% of the zinc-lead-silver Broken Hill-style mineralisation of E7390 in joint venture with Silver City Minerals Limited (ASX: SCI). Impact will free-carry Silver City's 20% interest to a Decision to Mine.

Golden Cross has a 1% gross production royalty on all metals to which Impact has rights to. Impact, at its election, also has the right to buy back the royalty for \$1.5 million at anytime up to a Decision to Mine, or leave the royalty uncapped during any production.

Squadron Resources Pty Limited has the right to invest \$1 million for a 19.9% interest in the nickel-copper-PGE rights under the terms of an investment into Impact as outlined in the announcement to the ASX dated [17 July 2015](#). However, Squadron is not liable for any payment of the royalty to Golden Cross.

Squadron Resources Pty Limited has no rights to earn into the Broken Hill style mineralisation.

Dr Michael G Jones
Managing Director

The review of exploration activities and results contained in this report is based on information compiled by Dr Mike Jones, a Member of the Australian Institute of Geoscientists. He is a director of the company and works for Impact Minerals Limited. He has sufficient experience which is relevant to the style of mineralisation and types of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code). Mike Jones has consented to the inclusion in the report of the matters based on his information in the form and context in which it appears.

APPENDIX 1 - SECTION 1 SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <hr/> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used</i></p> <hr/> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information</i></p>	<p>Rock Chip Samples Random rock samples were taken at surface which represented favourable geology and alteration to known mineralisation in the region. Samples are variably weathered.</p> <p>Soil Samples Soil samples were taken at 50 m intervals from a hole 15-20 deep and sieved to -2mm to collect about 250 g of material.</p> <p>Diamond Drilling Diamond drilling was used to produce drill core either with a diameter of 63.5 mm (HQ) or 47.6 mm (NQ). A handheld XRF instrument was used to analyse the drill core at 50 cm intervals.</p> <hr/> <p>Rock Chip Samples Representative rock chip samples at each sample site weigh between 0.8 and 1.2 kg. Soil samples are taken at a consistent depth below surface and sieved.</p> <p>Soil Samples and Drill Samples Sample representivity was ensured by a combination of Company Procedures regarding quality control (QC) and quality assurance / testing (QA). Examples of QC include (but are not limited to), daily workplace and equipment inspections, as well as drilling and sampling procedures. Examples of QA include (but are not limited to) collection of "field duplicates", the use of certified standards and blank samples approximately every 50 samples.</p> <hr/> <p>Rock Chip and Diamond Drill Samples Rock samples and split diamond core were sent to Intertek Adelaide where they were crushed, dried and pulverised (total prep) to produce a 25-30 g sub-sample for analysis by four acid digest with an ICP/AES finish for ore grade base metal samples and either lead collection or nickel sulphide fire assay with AAS or MS finish for gold and the PGMs. Weathered samples contained gossanous sulphide material. Soil samples were sent to SGS Perth for analysis by the MMI digest. The XRF data is qualitative only. A comparison between the XRF results and wet chemical assay data will be completed on receipt of final results.</p>
Drilling techniques	<p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>Diamond Drilling comprises NQ (47.6 mm diameter) and HQ (63.5 mm diameter) sized core. Impact diamond core is triple tube and is oriented. Historical diamond core was not oriented.</p>
Drill sample recovery	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed</i></p>	<p>Diamond core recoveries for all holes are logged and recorded. Recoveries are estimated to be approximately >97% for the Red Hill Prospect. No significant core loss or sample recovery problems are observed in the drill core.</p>

Criteria	JORC Code explanation	Commentary
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples</i>	Diamond core is reconstructed into continuous runs on an angle iron cradle for orientation marking. Depths are checked against the depth given on the core blocks and rod counts are routinely carried out by the driller.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No sample bias has been established.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Geological logging of samples followed company and industry common practice. Qualitative logging of samples included (but not limited to); lithology, mineralogy, alteration, veining and weathering. Diamond core logging included additional fields such as structure and geotechnical parameters. Magnetic Susceptibility measurements were taken for each 0.5 m diamond core interval. For diamond core, information on structure type, dip, dip direction, texture, shape and fill material has been recorded in the logs. RQD data has been recorded on selected diamond holes. Handheld XRF analysis was completed at 50 cm intervals on diamond core.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	All logging is quantitative, based on visual field estimates. Systematic photography of the diamond core in the wet and dry form was completed.
	<i>The total length and percentage of the relevant intersections logged</i>	All diamond drill holes were logged in full. Detailed diamond core logging, with digital capture was conducted for 100% of the core by Impact's on-site geologist.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	All core samples were sampled by half core. Selected intervals of quarter core will be selected for check assays if required.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	No RC drilling results are reported.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	Company procedures were followed to ensure sub-sampling adequacy and consistency. These included (but were not limited to) daily work place inspections of sampling equipment and practices, as well as sub-sample duplicates ("field duplicates").
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Laboratory QC procedures for rock sample and diamond drill core assays involve the use of internal certified reference material as assay standards, along with blanks, duplicates and replicates.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Rock and Soil Samples Field duplicates were taken at selected sample sites.

Criteria	JORC Code explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Diamond Core Samples Quarter core duplicate samples are taken randomly every 50 samples. Sample sizes at Red Hill are considered adequate due to mineralisation style.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	An industry standard fire assay technique for samples using lead collection with an Atomic Absorption Spectrometry (AAS) finish was used for gold and aqua regia digest for base metals and silver.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used to determine material element concentrations. A handheld XRF was used for qualitative analysis only.
	<i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Rock Chip Samples For the rock chips, quality control procedures for assays were followed via internal laboratory protocols. Accuracy and precision are within acceptable limits. Diamond Drill Samples Reference standards and blanks are routinely inserted into every batch of samples at a rate of 1 in every 50 samples.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	The results have not been verified by independent or alternative companies. This is not required at this stage of exploration.
	<i>The use of twinned holes.</i>	No drilling results are reported.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary assay data for rock chips has been entered into standard Excel templates for plotting in Mapinfo. All historical drill data has been entered digitally by previous explorers and verified internally by Impact.
	<i>Discuss any adjustment to assay data.</i>	There are no adjustments to the assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Sample locations and drill holes were located by hand held GPS.
	<i>Specification of the grid system used.</i>	The grid system for Broken Hill is MGA_GDA94, Zone 54.
	<i>Quality and adequacy of topographic control.</i>	Standard government topographic maps have been used for topographic validation. For the diamond holes, down-hole single shot surveys were conducted by the drilling contractor. Surveys were conducted at 15 m, 30 m and then approximately every 30 m down-hole.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	Sample spacing for the soil survey was on a 50 m by 50 m grid. Reconnaissance drill spacing is approximately 200 m.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Estimations of grade and tonnes have not yet been made.

Criteria	JORC Code explanation	Commentary
	<i>Whether sample compositing has been applied.</i>	Sample compositing has not been applied.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Not relevant to soil and rock chip results. The orientation of mineralisation in RHD001 yet to be determined.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Not relevant to soil and rock chip results or early stage exploration drill results.
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by Impact Minerals Ltd. Samples for Broken Hill are delivered by Impact Minerals Ltd by courier who transports them to the laboratory for prep and assay. Whilst in storage, they are kept in a locked yard. Tracking sheets have been set up to track the progress of batches of samples.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	At this stage of exploration a review of the sampling techniques and data by an external party is not warranted.

SECTION 2 REPORTING OF EXPLORATION RESULTS

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Broken Hill Project currently comprises 1 exploration licences covering 100 km ² . The tenement is held 100% by Golden Cross Resources Ltd. Impact Minerals Limited is earning 80% of the nickel-copper-PGE rights in the licence from Golden Cross. No aboriginal sites or places have been declared or recorded over the licence area. There are no national parks over the license area.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The tenement is in good standing with no known impediments.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	There has been no significant previous work at this prospect.
Geology	Deposit type, geological setting and style of mineralisation.	Nickel-copper-PGE sulphide mineralisation associated with an ultramafic intrusion.

Criteria	JORC Code explanation	Commentary
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. 	See Table in text.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>All reported assays have been length weighted. No top cuts have been applied. A cut-off of approximately 0.1% Cu, 0.4% Cu and 1.0% Cu has been applied for reporting of exploration results.</p> <p>High grade massive sulphide intervals internal to broader zones of disseminated sulphide mineralisation are reported as included intervals.</p> <p>No metal equivalents have been reported.</p>
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	The orientation of mineralisation in RHD001 is yet to be determined.
Diagrams	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	Refer to Figures in body of text.
Balanced reporting	<p>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>	All results reported are representative

Criteria	JORC Code explanation	Commentary
<p>Other substantive exploration data</p>	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</p>	<p>Assessment of other substantive exploration data is not yet complete however considered immaterial at this stage.</p>
<p>Further work</p>	<p>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive</p>	<p>Follow up work programmes will be subject to interpretation of results which is ongoing.</p>